


Technical Specification

Glide

Product Name:	Glide
Category:	LED Channel Light
Description:	High efficiency surface mount LED channel light with Osram LEDs



Dimensions

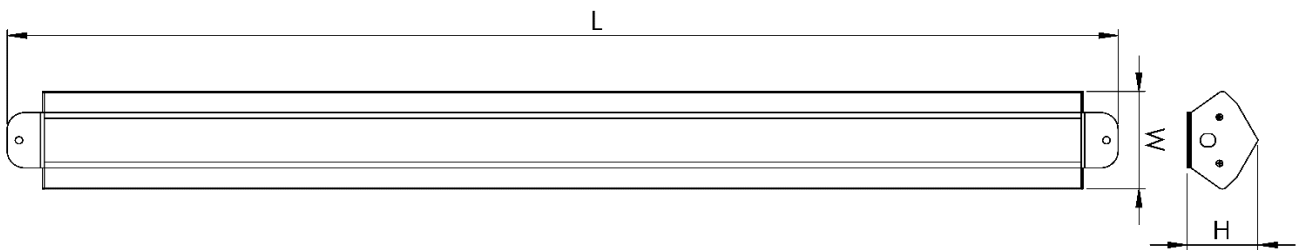


Product Code	Length (mm)	Width (mm)	Height (mm)
Glide-900	947	87	60
Glide-1200	1236	87	60

Technical Specification

Glide

Fitting Material	Powder coated extruded aluminium construction
Available finishes	Powder coated white, custom colours on request
Optic Type	Indirect
IP Rating	IP20
Mounting Type	Surface mount / P2000/ Suspended
LED Colours (CCT)	3000K, 4000K (others on request)
LED Colour Consistency	<3 SDCM
Colour Rendering Index (CRI)	CRI80 , (CRI90 on request)
LED Lifetime	L80B10 >50,000 hrs at Ta = 25° Celsius
Control Options	non-dim (N), DALI (DALI)
Operating Voltage/ Frequency	220 – 240 V/ 50 – 60 Hz
Optional Add-ons	Min. 1 hour emergency version available
	Compatibility with specific motion or light sensors
Warranty	5 year warranty as per LEDwise standard terms of warranty
Manufacture	Designed and Manufactured in South Africa

Optical and Electrical Characteristics							
Product Code	Plug Power (W)	LED Colour Code	Colour Temp (K)	Min CRI	Luminaire Luminous Flux (lm) *	Luminaire Luminous Efficacy (lm/W) *	Beam Angles
Glide-900-LM-40W	38.8	NW/WW	4000/3000	80	4105	105	
Glide-900-LM-63W	63.4	NW/WW	4000/3000	80	6477	102	
Glide-1200-LM-40W	38.8	NW/WW	4000/3000	80	4169	107	
Glide-1200-LM-61W	61.6	NW/WW	4000/3000	80	6117	99	

* Values accurate to within 10%

Product Ordering Code					
Example: Glide – 900 - 40W – NW – WT - N					
<i>Glide</i>	<i>900</i>	<i>40W</i>	<i>NW</i>	<i>WT</i>	<i>N</i>
Product code	Length	Power	LED colour	Fitting colour	Control

Document Info
Glide Rev 1