


Technical Specification

VP-1200

Product Name:	VP-1200
Category:	IP65 Linear Surface mounted - Diffused
Description:	High efficiency surface mount LED parking light with Osram LEDs and advanced diffuser technology



Dimensions

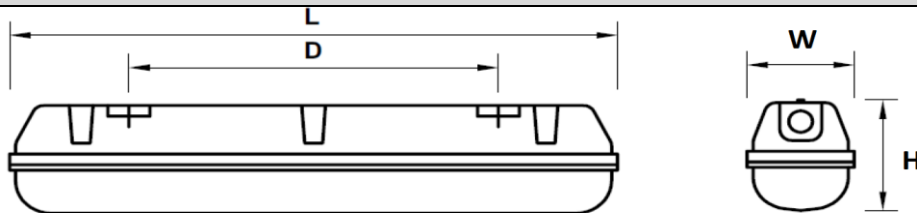

Product Code	Length (mm)	Mounting Pitch (mm)	Width (mm)	Height (mm)
VP-1200	1270	860	116	74


Technical Specification

VP-1200

Fitting Material	Polycarbonate housing
Available finishes	Grey Polycarbonate
Optic Type	Diffuser
IP Rating	IP65 IK08 Class II
Mounting Type	Surface mount / P2000 / Suspended
LED Colours (CCT)	3000K, 4000K (others CCT's available on request)
LED Colour Consistency	<3 SDCM
Colour Rendering Index (CRI)	CRI80 , (CRI90 on request)
LED Lifetime	L80B10 >50,000 hrs at Ta = 25° Celsius
Control Options	Non-dim (N), DALI (DALI)
Operating Voltage/ Frequency	220 – 240 V/ 50 – 60 Hz
Working temperature:	-20 - +40°C
Optional Add-ons	Min. 1 hour emergency version available
	Add-on microwave motion sensor
Warranty	5 year warranty as per LEDwise standard terms of warranty
Manufacture	Assembled in South Africa



Microwave Sensor
with Corridor
Function

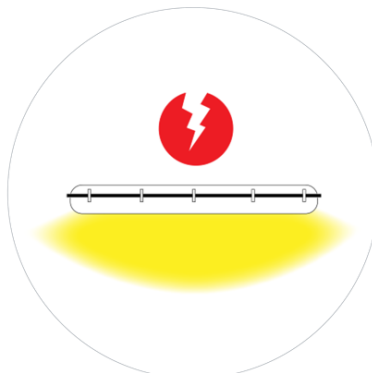

Built-in
Emergency Gear



Stainless
Steel Clips



Accessories

Installation tips:

- 1) Easy and quick to install under ceiling or on surface.
- 2) Shall not be installed on the surface where there is strong vibration.
- 3) When using PC diffuser, do not use strong alkaline, acidic or cleaning agent attack PC material.
- 4) Accessory bag: Cable gland, Mounting clips/Suspension hangers, mounting screws
- 5) For special use, please contact us


Technical Specification

VP-1200

Optical and Electrical Characteristics								
Product Code	Plug Power (W)	LED Colour Code	Colour Temp (K)	Min CRI	Luminaire Luminous Flux (lm) *	Luminaire Luminous Efficacy (lm/W) *	Bare LED Luminous flux (lm) **	Control/Drivers
VP-1200-40W	38.4	3080	3000	80	4871	123	5799	N (Non-Dim) DALI (DALI/Switch Dim)
		4080	4000		5473	138	6516	
VP-1200-50W	46.4	3080	3000	80	5490	120	6536	
		4080	4000		6169	135	7344	
VP-1200-60W	56.8	3080	3000	80	6495	116	7732	
		4080	4000		7298	131	8688	

* Values accurate to within 10%

Beam Angle – 110° x 133°



Product Ordering Code					
Example: VP – 1200 – 60W – 4080 – GR – N					
VP	1200	60W	4080	GR	N
Product Code	Length	Power	LED Colour	Fitting Colour	Control

Document Info
VP Rev 8