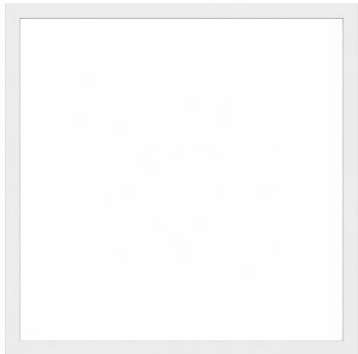
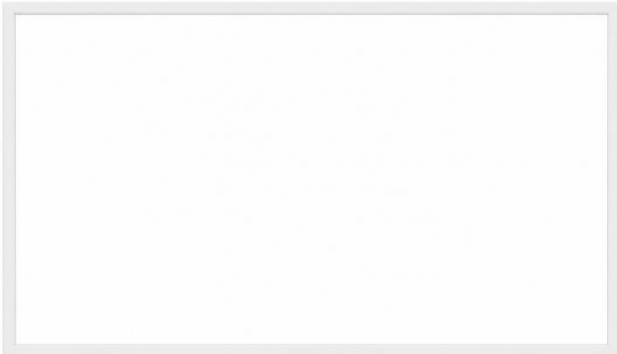


Technical Specification

P-6x6 | P-12x6

Product Name:	P-6x6 and P-12x6
Category:	LED Ceiling Panel
Description:	Backlit diffused high efficiency LED panel light
 	

Fitting Material	Pressed steel backing plate with polycarbonate diffuser
Available finishes	White
Optic Type	Diffused
IP Rating	IP20
Mounting Type	Surface Mount / Recessed
LED Colours (CCT)	4000K (other colours available on request)
LED Colour Consistency	<3 SDCM
Colour Rendering Index (CRI)	CRI > 80
LED Lifetime	L80B10 >50,000 hrs at Ta = 25° Celsius
Control Options	Non-dim, Phase cut Dim, DALI
Operating Voltage/ Frequency	220 – 240 V /50 Hz
Optional Add-ons	1 hour emergency version available
	Compatible with motion and light sensors
Warranty	5 year warranty as per LEDwise standard terms of warranty

Optical and Electrical Characteristics					
Product Code	Plug Power (W)	Luminaire Luminous Flux (lm)	Dimensions (mm)	Beam Angle (Deg)	Fitting Colour
		(4080) 4000K			
P-6x6-26W-WT-N	26	3640	595 x 595 x 26	110°	WT
P-12x6-50W-WT-N	50	7000	1195 x 595 x 26	110°	WT

* Values accurate to within 10%



Phone: +27 21 447 3325



info@ledwise.co.za



www.ledwise.co.za



Unit 2, 8th Avenue Industrial Estate, 69 8th Avenue, Maitland, 7405

Technical Specification


P-6x6 | P-12x6

Mounting Accessories

Surface Mounted Frame Kit



Suspension Kit

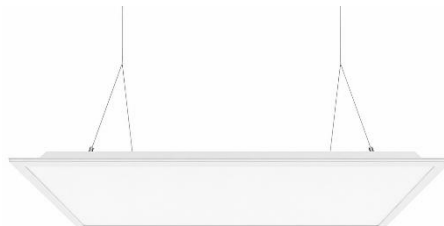

Product Ordering Code

Example: **P-6x6-26W-4080-WT-N** or **P-12x6-50W-4080-WT-N**

Document Info

P-LED Rev 3



Phone: +27 21 447 3325



info@ledwise.co.za



www.ledwise.co.za



Unit 2, 8th Avenue Industrial Estate, 69 8th Avenue, Maitland, 7405