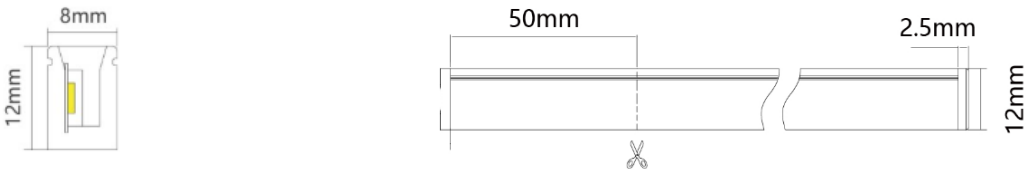


Technical Specification

NF-0812

Product Name:	Neon Flex
Category:	Diffused Light Line
Description:	24V medium powered diffused flexible LED Light Line in silicone profile housing
	

Dimensions				
				
Product Code	Width (mm)	Cut Length (mm)	Max Length per section (mm)	Height (mm)
NF-0812	8	50	5000	12

Fitting Material	Silicone housing
Available finishes	WT (White)
Optic Type	Diffused
IP Rating	IP65 / IP67
Mounting Type	Surface Mount / Recessed
LED Colours (CCT)	3000K, 4000K (others on request)
LED Colour Consistency	<3 SDCM
Colour Rendering Index (CRI)	CRI80 Standard
LED Lifetime	L70B10 >50,000 hrs at Ta = 25° Celsius
Control Options	Non-dim (N), DALI (DALI)
Operating Voltage/ Frequency	24V
Features	Stainless steel mounting clips included
Warranty	5 year warranty as per LEDwise standard terms of warranty

Technical Specification

NF-0812

Optical and Electrical Characteristics					
Product Code	Plug Power (W)	Luminaire Output (lm)		Beam Angle (°)	Fitting Colour
		3080 (3000K)	4080 (4000K)		
NF-0812-5000mm	11.52	515	540	110°	WT

* Values accurate to within 10%

Product Ordering Code				
Example: NF-0812 - 5000mm -12W/m- 4080				
NF	0812	5000mm	12W/m	4080
Product Code	Dimensions (W x H)	Reel Length	Power per metre	LED Colour/CRI

Document Info
NF-0812 Rev 3

